


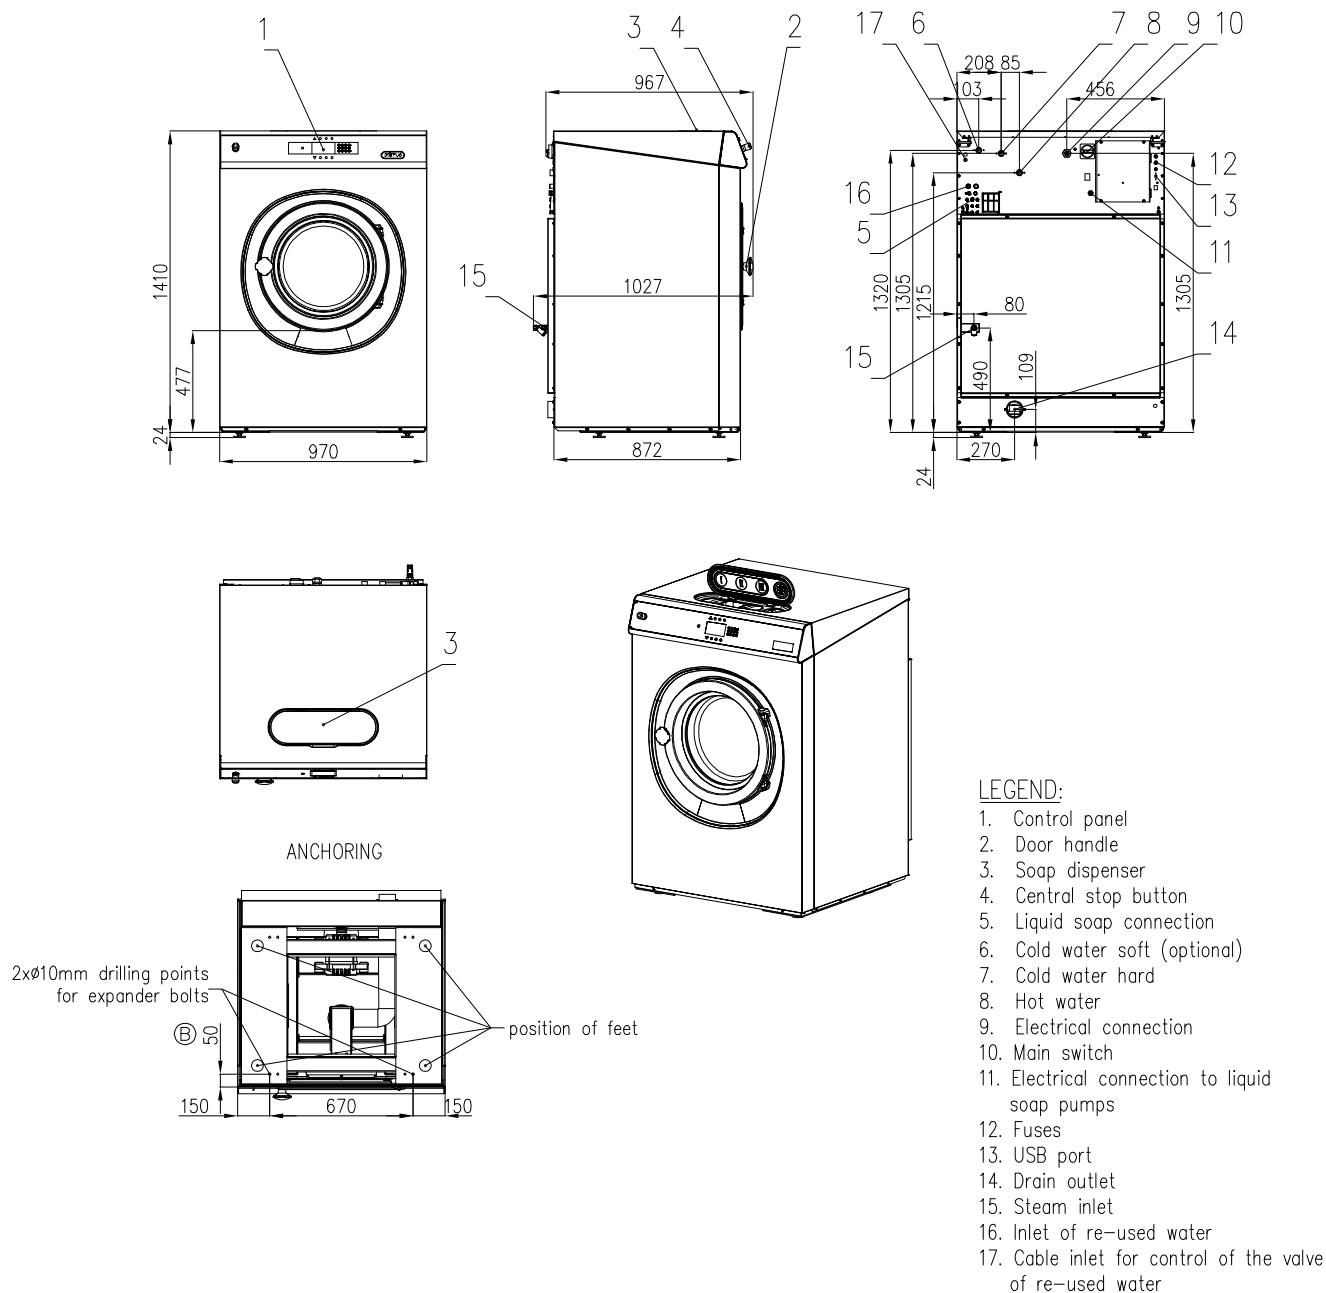

TECHNICAL SPECIFICATION

Capacity:	1:10 – 18kg/40lb max. 1:9 – 20kg/44lb
Inner drum dimensions: diameter	750 mm / 29.5"
Drum volume:	180 dm ³ / 39.6 gal
Drum revolutions: wash	42 rpm
high extraction	980 rpm
G–faktor:	400
Machine dimensions (max.): width	970 mm / 38.2"
depth	970 mm / 38.2"
height	1435 mm / 56.7"
Weight: netto	380 kg / 838 lb
brutto	395 kg / 871 lb
Machine electrical execution:	E: 3x380–415V+N 50Hz S: 1x200–240V 50Hz (A)
Rated motor power:	2.2 kW
Rated heating power input:	E: 12 kW
Rated input power of the machine:	E: 13.5 kW S: 2.3 kW (A)
Power supply protection – with el.heating	12kW/3AC 400V/25A
– without heating	1AC 20A
Conductors section (E / S)	5x4 mm ² Cu / 3x2.5 mm ² Cu
CONNECTIONS: recommended water pressure	0.3 ÷ 0.5 MPa
water connection standard / option	2x ¾"/3x ¾"
inlet of re–used water	ø19mm
drain connection	ø76 mm / 3"
flow volume through drain valve	210 l/min
steam inlet	½"
steam pressure	0.1÷0.8 MPa
Connections to liquid detergents:	8xø8 + 3xø12
Max. static load (with textile and water)	4.9 kN (A)
Max. dynamic load (intermittent vibrations)	4 ± 0.7 kN
Frequency of dynamic load	16.3 Hz

Part No. 1-16-60

	FX180	Date:	01/2012	No.	01–304–2
		Author:	TR	Index/date	B/07.2014
		WASHER EXTRACTORS			