




370x275x130 h



mm 350



Q= 20 LTmin



impulso - impulse



kg 8



KW 0,38

STRUTTURA IN ACCIAIO

Adatta a ogni ambiente di lavoro

Stainless steel structure suitable for any environment

Châssis en acier inox: adapté à tout milieu travail


Estructura de acero: apta a cualquier lugar de trabajo

INIZIO VUOTO

start vacuum
début du vide
activación vacío

INIZIO SALDATURA

start sealing
début de la soudure
activación soldadura

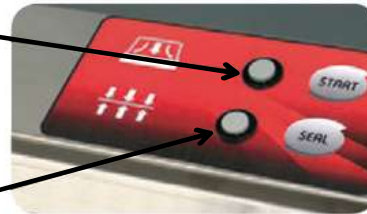

RESISTENZA 5 mm

Per una perfetta saldatura del sacchetto

Electrical resistance 5 mm for a perfect seal

Résistance de 5 mm pour une soudure parfaite

Resistencia de 5 mm para un sellado perfecto de la bolsa



FACILE DA USARE

easy to use

facile à utiliser

fácil de usar



STRUTTURA ROBUSTA

strong structure

structure robuste

estructura robusta



INGOMBRO LIMITATO

limited space

faible encombrement

espacio limitado




470x275x130 h



mm 450



Q= 20 LTmin



impulso - impulse



kg 10



KW 0,45

EUROMINI



NO LIQUIDS



230 V/50 Hz

EUROBIG



NO LIQUIDS



230 V/50 Hz